

MFR-1300 Series Features and Benefits

MFR-1300 Series Features and Benefits

- Self-contained internal pump and large capacity collection chamber makes desoldering easy
- Pistol handpiece can easily be converted to a pencil grip
- SmartHeat® technology operates at lower and safer temperatures and eliminates overshoot.
- No calibration required which saves money and down-time.

Makes Desoldering Clean and Easy

Metcal's MFR-1300 Desoldering System is a powerful, cost-effective system with a small footprint. With 0.7 bar of vacuum suction force, both the MR-1350 and MR-1351 have what it takes to make through-hole desoldering clean and easy.

Each system includes a Desoldering Pistol with a large capacity, easy to change solder collection chamber to ensure minimum downtime. The pistol can easily be converted to a pencil grip for additional control. Metcal offers a wide range of long life desoldering tips that will keep your equipment working efficiently.

The MFR-1351 unit has both desoldering and soldering capabilities, eliminating the need for two separate units. The MFR-1351 uses SmartHeat®, a microprocessor controlled system which operates at lower temperatures and eliminates calibration time.

The MFR-1300 series is the best choice for small or large production environments which need exceptional desoldering and soldering performance from a unit with a small footprint.

Technical Specifications

Part Number	MFR-1350 / MFR-1351
Input Line Voltage	100-240 VAC
Input Line Frequency	50/60Hz
Power Consumption	110W Max. (Power Supply MFR-PS1300)
Output Power	60 Watts Max*
Output Frequency	450 KHz
Idle Tip Temperature Stability	+/- 1.1°C (2°F) in Still Air
Ambient Operating Temperature	10 - 40°C (50 - 104°F)
Maximum Enclosure Temperature	55°C (131°F)
Noise level	< 55 dB
Vacuum Suction Force	0.7 bar (21" Hg at vacuum pump @ sea level)
Power Cord (3-wire)	183cm (72")
Desolder Hand-piece Cable Length	152cm (60"), burn proof, ESD safe
Solder Hand-piece Cable Length	122cm (48"), burn proof, ESD safe
Hand-piece Connector	8 pin power connector
Tip to Ground Potential	<2mV
Tip to Ground Resistance	<2 Ohms
Surface Resistivity	10 ⁵ – 10 ⁸ Ohms
Approvals	cTUVus, CE
Dimensions (approx.) W x D x H	170 x 200 x 152.5mm (7" x 8" x 6")
Workstand Dimensions	100 x 200 x 100mm (4" x 8" x 4")

* RF SmartHeat Technology provides greater power. For more details, visit www.metcal.com/smartheat



Desoldering pistol can easily be changed to a pencil grip for additional control.

Large capacity desoldering collection chamber is easy to change, reducing downtime



Metcal MFR-1300 Series 60W Dual Output System w/Internal Pump

MFR-1300 Series System and Accessories

Part No.	Photo	Description
MFR-1350	1	Desolder System with Internal Pump
<i>Includes:</i>		
MFR-PS1300	A	Dual Output Power Supply
MFR-H5-DS	B	Desolder Hand-piece
MFR-WSDSU	C	Workstand for Desolder Hand-piece
DXP Tips	D	Desoldering Tips (SOLD SEPARATELY)
<hr/>		
MFR-1351	2	Desolder / Solder System with Internal Pump
<i>Includes:</i>		
MFR-PS1300	A	Dual Output Power Supply
MFR-H5-DS	B	Desolder Hand-piece
MFR-WSDSU	C	Workstand for Desolder Hand-piece
MFR-H1-SC2	E	Solder Hand-piece
WS1	F	Workstand for Solder Hand-piece
DxP Tips	D	Desoldering Tips (SOLD SEPARATELY)
SxP Cartridges	G	Soldering Cartridges (SOLD SEPARATELY)
RxP Cartridges	H	Rework Cartridges (SOLD SEPARATELY)



See page 3 for additional accessories



D
DxP Desoldering
Tips
See pgs. 4



G
SxP Soldering
Cartridges
See pgs. 5 - 6



H
RxP Rework
Cartridges
See pg. 6

A
MFR-PS1300
Power Supply -
Dual output w/3
position switch
(Left/Both/Right)



Also Available - MFR-1150 Desoldering / Soldering Unit



MFR-1150 Desoldering System includes:

- MFR-PS-1100** - Power Supply
- MFR-HS-DS** - Desolder Hand-piece
- MFR-WSDSX** - Workstand with Venturi
- MFR-FTKIT** - Air Hose and Fittings Kit (for shop air connections)
- AC-TC** - Desolder Tip Cleaner Tool

Also Available From Metcal - MFR-1150 Desoldering System


Metcal also offers the MFR-1150 Desoldering System - a single output system and a workstand with a built in venturi helps to efficiently eliminate unwanted solder. The workstand uses your shop air system to create a **.85 bar vacuum**, which helps remove and collect nonessential solder.

The MFR-1150 includes a Desoldering Pistol with an easy to change, large capacity solder collection chamber to ensure minimum downtime. The pistol can easily be converted to a pencil grip for additional control. Metcal offers a wide range of long life desoldering tips that will keep your equipment working efficiently.

For more information about Metcal's MFR-1150 Desoldering System or any Metcal product, **visit www.Metcal.com or contact your local Metcal representative.**



Metcal MFR-1300 Series Accessories and Replacement Parts



Hand-pieces and replacement coils

MFR-H1-SC2	3	Cartridge Solder / Rework Hand-piece (MFR)
MFR-H2-ST2	4	Tip Solder Hand-piece (MFR)
MFR-CA3		Coil Assembly for MFR-H2-ST2 Hand-piece (MFR)
MFR-H4-TW	5	Precision Tweezer Hand-piece (MFR)
MFR-H6-SSC	6	SSC Cartridge Solder Hand-piece (MFR)
MFR-H5-DS	7	Desolder Hand-piece
MFR-HSREC		Cartridge Solder / Rework Hand-piece with long cord (1.83m / 6ft)
MFR-HSRLR	8	Cartridge Solder / Rework Hand-piece with long reach access




Workstands

WS1		Universal Auto Sleep Workstand
WS2		Round Auto Sleep Workstand
WS2-NS	9	Solder Workstand (PS-900)
MFR-WSPT	10	Non Sleeper Precision Tweezer Workstand
MFR-WSDSX	11	Venturi Workstand for Desolder Hand-piece
MFR-WSDSU		Non Sleeper Workstand for Desolder Hand-piece
WS1CB		Solder Rework Cradle Replacement for WS1 Workstand
WS2CB		Solder Rework Cradle Replacement for WS2 Workstand
MFR-WSDSCB		Replacement cradle for all MFR Desolder Workstands * for all rectangular MFR workstands



Upgrade Kits

MFR-UK1		Solder Cartridge Hand-piece (MFR-H1-SC2) and Workstand (WS1)
MFR-UK2		Solder Tip Hand-piece (MFR-H2-ST2) and Workstand (WS1)
MFR-UK4		Tweezer Cartridge Hand-piece (MFR-H4-TW) and Workstand (MFR-WSPT)
MFR-UK5		Desolder Hand-piece (MFR-H5-DS) and Workstand (MFR-WSDSX)
MFR-UK6		Solder Cartridge Hand-piece (MFR-H6-SSC) and Workstand (WS2)
MFR-H5-DS-C		Desolder Hand-piece (MFR-H5-DS) and Workstand cradle (MFR-WSDSCB)



Lead-Free Process Identification

WS1G	12	Green Universal Auto Sleep Workstand
WS1CG		Green Solder Rework Cradle Replacement for WS1 Workstand
WS2CG		Green Solder Rework Cradle Replacement for WS2 Workstand
AC-CK1	13	Green Identification Ring for SxV Cartridges (Pack of 50)
AC-CK3		Green Identification Ring for SSC Cartridges (Pack of 50)
AC-CK4	14	Green Identification Ring for SxV Tips (Pack of 50)

Miscellaneous Accessories

AC-BRUSH	15	Soft Brass Brush
AC-CP2		Cartridge and Tip Removal Pad
AC-FX1	16	Fume Extraction Kit
AC-IK		Interlocking / Mounting Kit
MFR-PM70		Power Meter for MFR Series
AC-Y10		Yellow Sponge for WS1 Workstand (Pack of 10)
AC-YS4		Yellow Sponge Round for WS2 Workstand (Pack of 10)
AC-BP		Brass Pad (Pack of 10)


Desoldering Accessories

MFR-DC10	17	Disposable Collection Chamber for MFR-H5-DS (pack of 10)
MFR-DC100		Disposable Collection Chamber for MFR-H5-DS (pack of 100)
MFR-HDCA	18	Coil Assembly for MFR Desolder Hand-piece
MFR-PG		Replacement Pistol grip for MFR-H5-DS Hand-piece
AC-SK1		Seal Kit Collection Chamber (pack of 2)
AC-VP		Vacuum Port
AC-VL		ESD Air Hose
AC-VPF		Vacuum Port Filter (pack of 5)
LM-PS		Power supply for MFR-WSDSX with multi plug adapters
AC-TC		Desoldering Tip Cleaner Tool



Metcal MFR-1300 Series DxP Desoldering Tips

Compatible with: MFR-1150, MFR-1350, MFR-1351 systems with MFR-H5-DS hand-piece and previous MFR-DSX, -DSI, -SDX, -SDI Systems with MFR-HDS hand-piece.
All dimensions shown are in mm (inches)

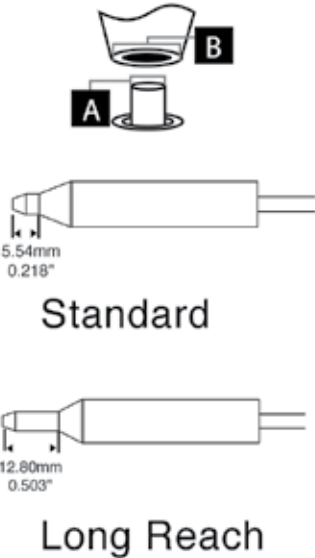DxP DESOLDERING TIPS		A	B	TYPE
 <p>Standard</p> <p>Long Reach</p>	DFP-CN2	0.64	1.78	Standard
	DCP-CN2	(.025)	(.070)	Standard
	DFP-CN3	0.76	2.03	Standard
	DCP-CN3	(.030)	(.080)	Standard
	DFP-CN4	1.02	2.28	Standard
	DCP-CN4	(.040)	(.090)	Standard
	DFP-CN5	1.27	2.64	Standard
	DCP-CN5	(.050)	(.104)	Standard
	DFP-CN6	1.52	2.84	Standard
	DCP-CN6	(.060)	(.112)	Standard
	DFP-CN7	2.41	3.63	Standard
	DCP-CN7	(.095)	(.143)	Standard
	DFP-CNL3	0.76	2.03	Long Reach
	DCP-CNL3	(.030)	(.080)	Long Reach
DFP-CNL4	1.02	2.28	Long Reach	
DCP-CNL4	(.040)	(.090)	Long Reach	
DFP-CNL5	1.27	2.64	Long Reach	
DCP-CNL5	(.050)	(.104)	Long Reach	

F = FR4 / Fiberglass, for most standard applications T = Temperature Sensitive C = Ceramic for high thermal demand applications.

See pages 5 - 6 for SxP Soldering Cartridges and
page 6 for RxP Blade Rework Cartridges

Metcal MFR-1300 Series SxP Soldering Cartridges



SxP SOLDERING & REWORK CARTRIDGES

Compatible with: MFR-1110, MFR-1161, MFR-1351, MFR-2211, MFR-2241 Systems and MFR-H1-SC hand-piece

CHISEL

	SFP-CH10 STP-CH10 SCP-CH10
	SFP-CH15 STP-CH15 SCP-CH15
	SFP-CHB15 STP-CHB15 SCP-CHB15
	SFP-CH20 STP-CH20 SCP-CH20
	SFP-CHL20 STP-CHL20 SCP-CHL20
	SFP-CH25 STP-CH25 SCP-CH25
	SFP-CH30 STP-CH30 SCP-CH30
	SFP-CH35 STP-CH35 SCP-CH35
	SFP-CH50 STP-CH50 SCP-CH50
	STP-WV20 SFP-WV20 SCP-WV20
	STP-WV30 SFP-WV30 SCP-WV30

HOOF

CONICAL

BEVEL

HOOF

KNIFE

	SFP-CN04 STP-CN04 SCP-CN04
	SFP-CNB04 STP-CNB04 SCP-CNB04
	SFP-CNL04 STP-CNL04 SCP-CNL04
	SFP-CN05 STP-CN05 SCP-CN05
	SFP-CNB05 STP-CNB05 SCP-CNB05
	SFP-CNL06 STP-CNL06 SCP-CNL06
	SFP-BVL10 STP-BVL10 SCP-BVL10
	SFP-DRH05 STP-DRH05 SCP-DRH05
	SFP-DRH610 STP-DRH610 SCP-DRH610
	SFP-DRH15 STP-DRH15 SCP-DRH15
	SFP-DRH615 STP-DRH615 SCP-DRH615
	SFP-DRH35 STP-DRH35 SCP-DRH35
	SFP-DRK50 STP-DRK50 SCP-DRK50

E = FR4 / Fiberglass, for most standard applications **T** = Temperature Sensitive **C** = Ceramic for high thermal demand applications.

Metcal MFR-1300 Series RxP Blade Rework Cartridges

Compatible with: MFR- 1110, MFR-1161, MFR-1351, MFR-2211, MFR-2241 Systems, MFR-H1-SC and MFR-H1-SC2 hand-pieces. All dimensions shown are in mm (inches)

RxP REWORK CARTRIDGES		A	B	D	SMT TYPE			
BLADE		REF-BL1	10	-	-	-		
		RCP-BL1	(0.41)	-	-	-		
		REF-BL2	15.6	-	-	-		
	RCP-BL2	(0.62)	-	-	-			
	REF-BL3	22.1	-	-	-			
	RCP-BL3	(0.87)	-	-	-			
TUNNEL		REF-DL1	5.18	10.16	3.22	Tunnel SOIC-14-16		
		RCP-DL1	(0.204)	(0.40)	(0.127)			
		REF-DL2	5.18	4.32	2.29	Tunnel SOIC-8		
	RCP-DL2	(0.204)	(0.17)	(.09)				
	REF-DL3	6.86	11.15	2.29	Tunnel SOIC-16			
	RCP-DL3	(.270)	(0.44)	(.09)				
SLOT		REF-SL1	2.34	1.37	1.78	0805 Chip Package		
		RCP-SL1	(.092)	(.054)	(.07)			
	REF-SL2	3.48	1.63	1.78	1206 Chip Package			
	RCP-SL2	(.137)	(.064)	(.07)				
QUAD		REF-QD4	12.70	11.43	3.81	15.24	13.97	PLCC 32
		RCP-QD4	(.500)	(.450)	(.150)	(.600)	(.550)	
		REF-QD6	17.78	16.76	3.81	17.78	16.76	PLCC 44
		RCP-QD6	(.700)	(.660)	(.150)	(.700)	(.660)	
		REF-QD7	25.27	24.38	5.59	25.27	24.38	PLCC 68
		RCP-QD7	(.995)	(.960)	(.220)	(.995)	(.960)	
		REF-QD10	20.32	19.30	3.81	20.32	19.30	PLCC 52
RCP-QD10	(.800)	(.760)	(.150)	(.800)	(.760)			
REF-QD15	13.34	12.32	2.79	13.34	12.32	TQFP 80		
RCP-QD15	(.525)	(.485)	(.110)	(.525)	(.485)			
REF-QD19	16.13	16.13	3.30	16.13	16.13	QFP 44		
RCP-QD19	(.635)	(.635)	(.130)	(.635)	(.635)			
REF-QD20	16.51	16.51	3.30	22.48	22.48	QFP 100		
RCP-QD20	(.650)	(.650)	(.130)	(.885)	(.885)			

E = FR4 / Fiberglass, for most standard applications T = Temperature Sensitive C = Ceramic for high thermal demand applications.